FITS NPT & BSPT THREADS

QPM

AL 360®

MODULAR HOSE SYSTEM



TO GET WHERE OTHERS CANNOT REACH

■ *Extremely flexible system affords unparalleled range of motion*

■ *Vibration resistant* ■ *Non electro-conductive* ■ *Resistant to chemical agents*

■ *Fits NPT and BSPT threads*











Material: Acetal
Maximum Operating Temperature: 122˚F (50˚ C)
Maximum Pressure: up to 90 PSI (6 bar)
(will vary with application)


WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE OR OBLIGATION.

AL 360®


AL 360 - Standard Fittings			Inside Diameter 10mm (3/8 inch)		
	Part No.	Description		Part No.	Description
	AL1818	Standard Pack 22 radial connectors 3 nozzles (2mm, 3.5mm & 6.5mm dia. orifice) 2 fittings (1/4" and 1/8" NPT/BSPT) Overall length = 335mm		AL1833	Pack of 4 connectors (45°)
				AL1835	Pack of 2 tees
	AL1819	22 radial connectors (length = 305mm)		AL1837	Pack of 4 nozzles (10mm diameter)
	AL1821	Pack of 4 nozzles (2mm diameter)		AL1839	Pack of 4 fittings (3/8" NPT/BSPT)
	AL1823	Pack of 4 nozzles (3.5mm diameter)		AL1841	Pack of 2 flat nozzles (55mm x 3.5mm)
	AL1825	Pack of 4 nozzles (6.5mm diameter)		AL1843	Pack of 4 fittings (1/8" NPT/BSPT)
	AL1827	Pack of 2 flat nozzles (26.5mm x 1mm)		AL1845	Pack of 4 fittings (1/4" NPT/BSPT)
	AL1829	Pack of 4 fittings (1/8" NPT/BSPT)		AL1847	Pack of 4 nozzles (2mm diameter - 9 holes)
	AL1831	Pack of 4 fittings (1/4" NPT/BSPT)			

Assembly Pliers

Versatile pliers ease assembly of AL360 connectors

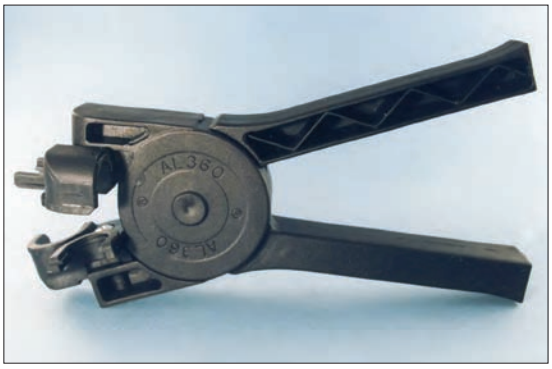

Part No. AL6295

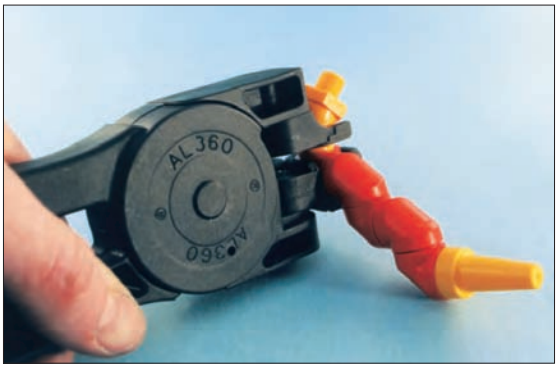

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE OR OBLIGATION.