

Extension Tubes

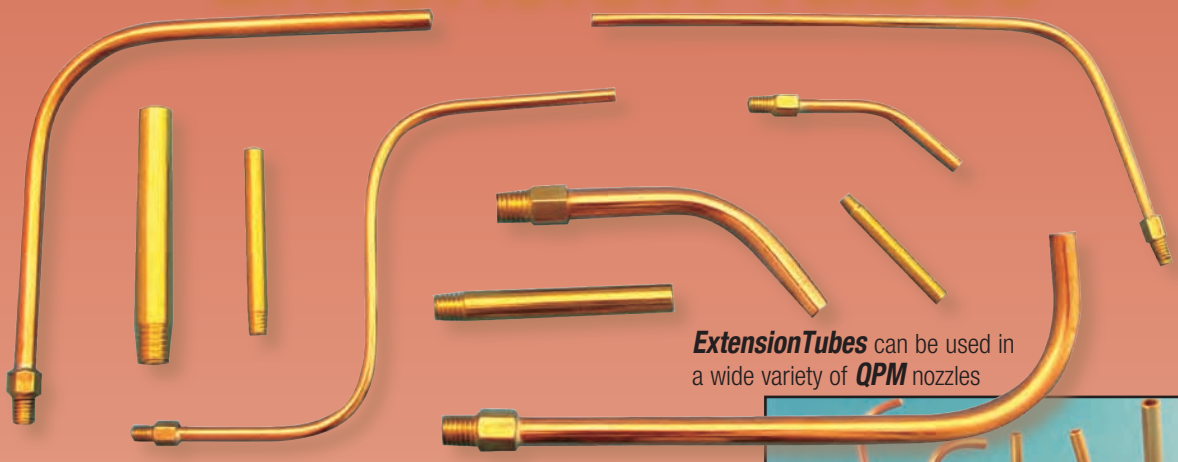

ExtensionTubes can be used in a wide variety of ***QPM*** nozzles

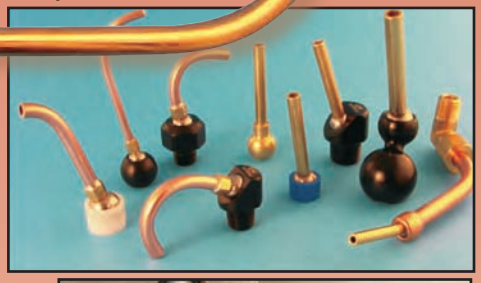

- ***Extension Tubes*** *install in seconds and make aiming a breeze*
- *Choose rigid brass* ***Extension Tubes*** *to direct coolant straight to the cutting edge*
- *Choose bendable copper* ***Extension Tubes*** *to direct coolant around obstructions*
- *Cut tube to desired length to suit your application*

DIMENSIONS IN MILLIMETERS — RIGID BRASS EXTENSION TUBES


PART NO. "E"	THREAD "L"	LENGTH Dia. "d"	INSIDE Qty	Pkg	Configuration
SBT09705	M3.5 X .6	30mm	2mm	5	
SBT09710	M4 x .7	30mm	2mm	5	
SBT09720	M5 x .8	40mm	3mm	5	
SBT09730	M6 x 1.0	50mm	4mm	5	
SBT09735	M7 x 1.0	55mm	5mm	5	
SBT09740	M8 x 1.25	55mm	5.5mm	5	

Material: Brass **Maximum Pressure:** 500 PSI (33 bar) **Max Operating Temperature:** 300°F (150°C)




Brass ExtensionTubes are ideal for directing coolant straight to the cutting edges.

DIMENSIONS IN INCHES (except as noted) — BENDABLE COPPER EXTENSION TUBES

PART NO.	THREAD "E"	"C" Hex	Tubing Size "A"	Tubing ID "d"	Pkg Qty	Configuration
ET09805	M3.5 x .6	3/16"	1/8"	.07"	5	
ET09810	M4 x .7	3/16"	1/8"	.07"	5	
ET09820	M5 x .8	1/4"	3/16"	.12"	5	
ET09830	M6 x 1.0	1/4"	3/16"	.12"	5	
ET09835	M7 x 1.0	5/16"	1/4"	.18"	5	
ET09840	M8 x 1.25	5/16"	1/4"	.18"	5	
ET09845	M8 x .5	6mm	3/16"	.12"	5	
ET09850	M8 x .5	7mm	1/4"	.18"	5	
ET09855	M10 x .5	6mm	3/16"	.12"	5	
ET09860	M10 x .5	8mm	1/4"	.18"	5	
ET09865	M12 x .5	6mm	3/16"	.12"	5	
ET09870	M12 x .5	8mm	1/4"	.18"	5	
ET09875	M12 x .5	10mm	5/16"	.25"	5	

Ideal for Coromant Capto* toolholders

*Coromant Capto is a registered trademark of Sandvik AB

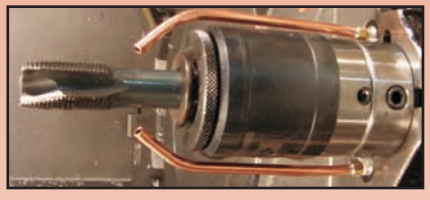

Bendable ExtensionTubes allow coolant to be directed around obstructions such as floating tap holders (above) or insert clamps (below)

Material:
Hex Fitting: Brass
Tube: Copper
Solder: Lead-free

Max Pressure:
500 PSI (33 bar)

Maximum Operating Temperature: 300°F (150°C)



WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE OR OBLIGATION.